

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Whirl

Mini Light 4CCT

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-19408 8"	2700K	BK Black	21 W	1103	1027
	3000K		21 W	1103	1027
	3500K		21 W	1103	1027
	4000K		21 W	1103	1027

Example: **PD-19408-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Like a tornado whirling in space, multiple curves of illumination are backed by a black frame and suspended from a cloud-like canopy. Integrated LEDs provide crisp, clean light to modern spaces.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	4000K,3500K,3000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body with silicon diffuser




FINISHES:



Black

LINE DRAWING:

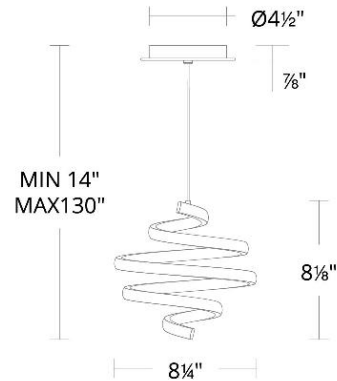

PD-19406