

WAC LIGHTING

Ice Cube

Linear Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29303L 8" - 3 Lights	2 700K/3000K/3500K/4000K 90	21 W	1130	AB Aged Brass BK Black

Example: **PD-29303L-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser

REPLACEMENT PARTS

RPL-GLA-29308 - PD-29308 Crystal




FINISHES:



Black Aged Brass

LINE DRAWING:

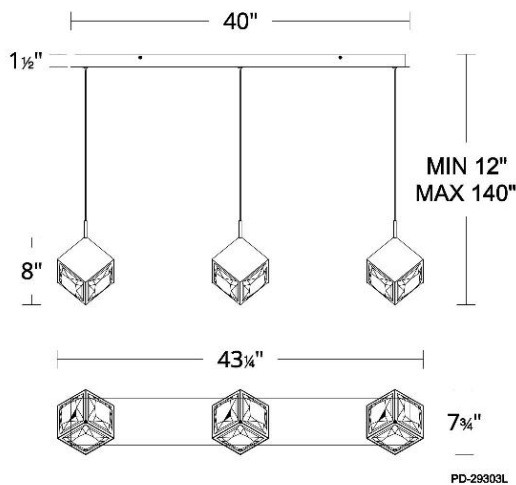

WAC LIGHTING

Ice Cube

Linear Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29305L 8" - 5 Lights	2 700K/3000K/3500K/4000K 90	36 W	1930	AB Aged Brass BK Black

Example: **PD-29305L-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL,Title 24 JA8 Compliant Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser

REPLACEMENT PARTS

RPL-GLA-29308 - PD-29308 Crystal




FINISHES:



Black Aged Brass

LINE DRAWING:

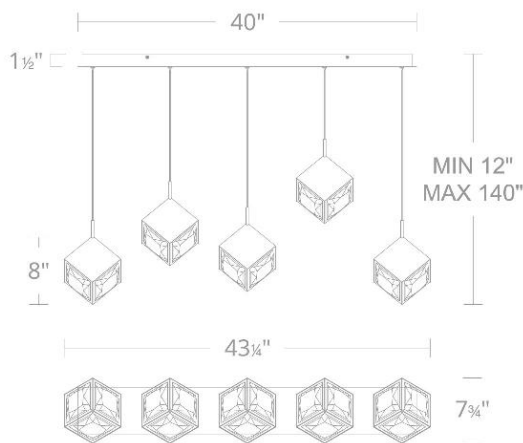

PD-29305L

WAC LIGHTING

Ice Cube

Linear Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29314L 8" - 14 Lights	2 700K/3000K/3500K/4000K 90	102 W	5420	AB Aged Brass BK Black

Example: **PD-29314L-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

FEATURES

- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 14 & 23 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser

REPLACEMENT PARTS


RPL-GLA-29308 - PD-29308 Crystal



FINISHES:



LINE DRAWING:

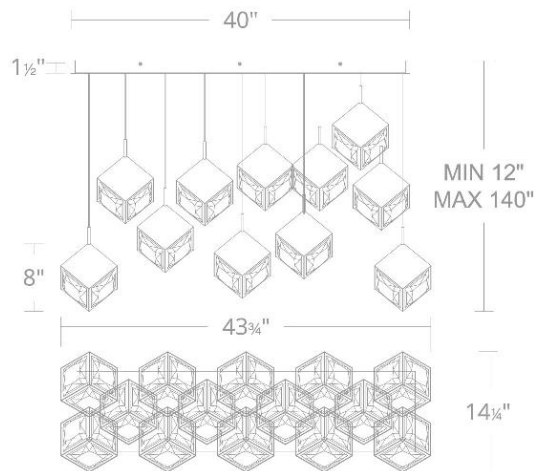

PD-29314L

WAC LIGHTING

Ice Cube

Linear Multi Light 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-29323L 8" - 23 Lights	2 700K/3000K/3500K/4000K 90	165 W	8820	AB Aged Brass BK Black

Example: **PD-29323L-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Faceted like a hand-cut jewel, adding a dash of chic to a room's ensemble.

FEATURES


- K9 crystal
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 14 & 23 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Steel frame with K9 crystal diffuser




FINISHES:



Black Aged Brass

LINE DRAWING:

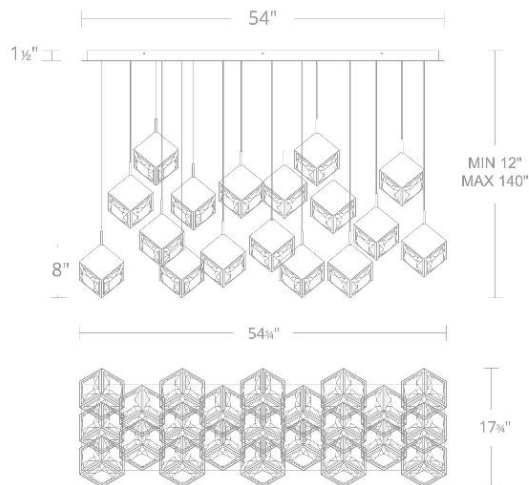

PD-29323L