

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Linear Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47803L 21" - 3 Lights	2 700K/3000K/3500K/4000K 90	64 W	2902	BK Black CH Chrome

Example: **PD-47803L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




### FINISHES:



Chrome

Black

### LINE DRAWING:

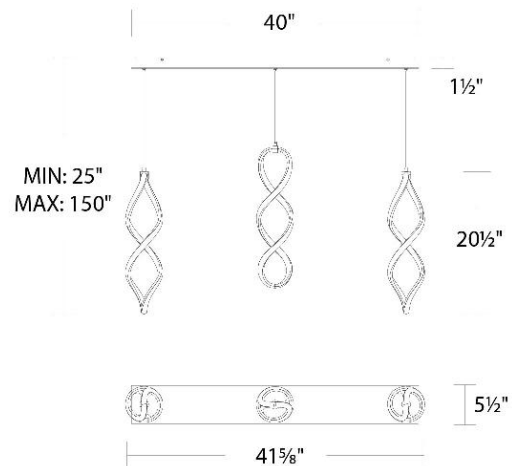

PD-47803L

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Linear Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47805L 21" - 5 Lights	2 700K/3000K/3500K/4000K 90	107 W	4837	BK Black CH Chrome

Example: **PD-47805L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




### FINISHES:



Chrome

Black

### LINE DRAWING:

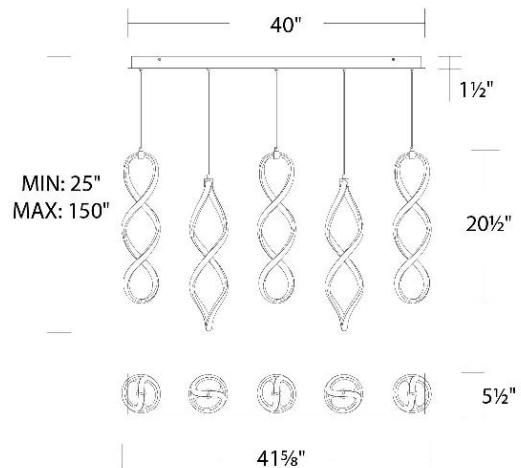

PD-47805L

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Linear Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47814L 21" - 14 Lights	2 700K/3000K/3500K/4000K 90	300 W	13544	BK Black CH Chrome

Example: **PD-47814L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




### FINISHES:



Chrome

Black

### LINE DRAWING:

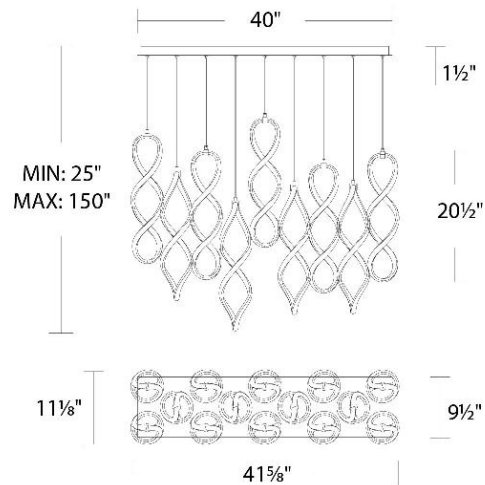

PD-47814L

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Linear Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47823L 21" - 23 Lights	2 700K/3000K/3500K/4000K 90	493 W	22251	BK Black CH Chrome

Example: **PD-47823L-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 23 light format exceeds 50 lbs. and must be installed adequately on the ceiling with weight distributed evenly on the mounting backplate.
- Driver concealed within the canopy

### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




### FINISHES:



Chrome      Black

### LINE DRAWING:

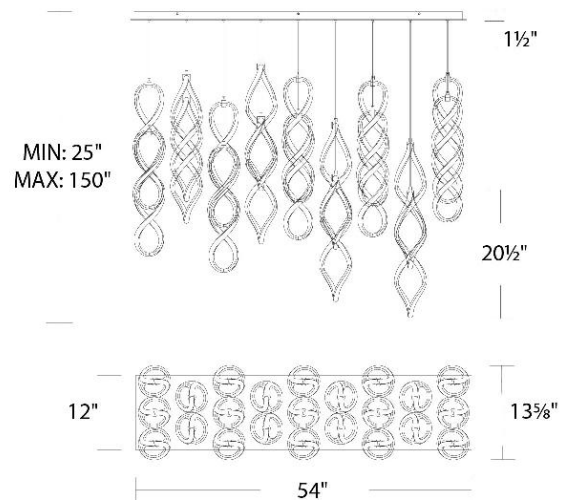

PD-47823L