

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Swerve

## Chandelier 4CCT

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-67426 26"	2700K	BK Black	20 W	2100	1260
	3000K		20 W	2100	1260
	3500K		20 W	2100	1260
	4000K		20 W	2100	1260

Example: **PD-67426-40-BK**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Fluid circles of black and light twist within each other, casting diffused LED illumination in all directions.

### FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on slope ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

### SPECIFICATIONS

Color Temp:	4000K,3500K,3000K,2700K
Input:	120-277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum body, silicone diffuser




### FINISHES:



Black

### LINE DRAWING:

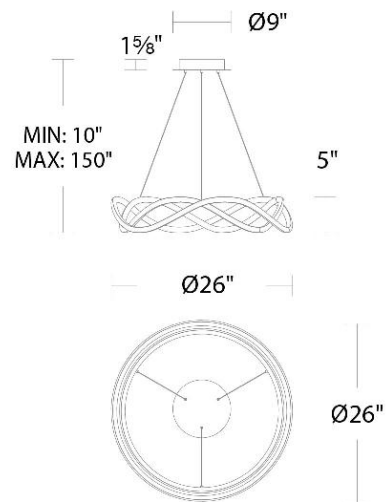

PD-67426