

# WAC LIGHTING

## Interlok

### Bath & Wall Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-77424 24"	2700K	BN Brushed Nickel	18 W	2542	1398
	3000K		18 W	2542	1398
	3500K		18 W	2542	1398
	4000K		18 W	2542	1398

Example: **WS-77424-40-BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Smoothly opulent. Thick-walled shades offer beautifully diffuse illumination. The frame's elegant lines draw attention to its glass blocks, fashioning a statement of luxury for yourbath.

#### FEATURES

- Thick walled glass diffusers
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	4000K,3500K,3000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Extruded aluminum body with glass diffuser




#### FINISHES:



Brushed  
Nickel

#### LINE DRAWING:

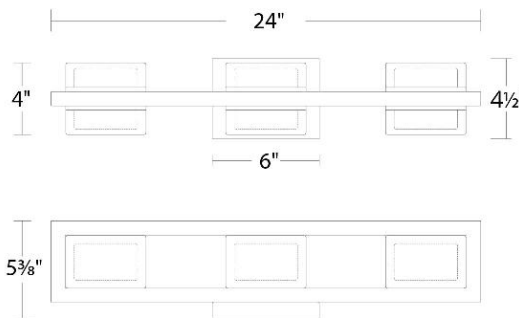

WS-77424

# WAC LIGHTING

# WAC LIGHTING

## Interlok

### Bath & Wall Light 4CCT

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-77436 36"	2700K	BN Brushed Nickel	25 W	3438	1891
	3000K		25 W	3438	1891
	3500K		25 W	3438	1891
	4000K		25 W	3438	1891

Example: **WS-77436-40-BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Smoothly opulent. Thick-walled shades offer beautifully diffuse illumination. The frame's elegant lines draw attention to its glass blocks, fashioning a statement of luxury for yourbath.

#### FEATURES

- Thick walled glass diffusers
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	3500K,3000K,4000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% , TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Extruded aluminum body with glass diffuser




#### FINISHES:



Brushed  
Nickel

#### LINE DRAWING:

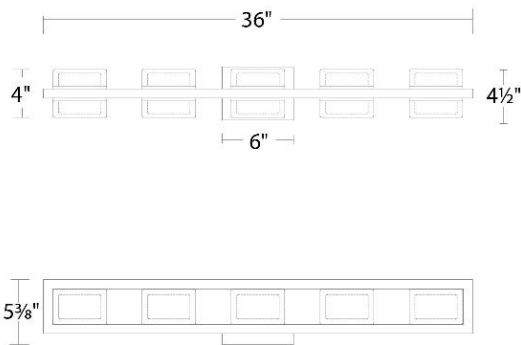

WS-77436

# WAC LIGHTING