

WAC LIGHTING

Bastone

Bath & Wall 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-99426 26"	2700K	BK Black	23 W	2245	924
	3000K	BN Brushed Nickel	23 W	2245	924
	3500K		23 W	2245	924
	4000K		23 W	2245	924
				23 W	2245

Example: **WS-99426-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

A simple rectangle radiates from LED illumination. This seamless design presents a sharp visual style.

FEATURES

- Light source offers 360 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

SPECIFICATIONS

Color Temp:	4000K,3500K,3000K,2700K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,Title 24 JA8 Compliant Damp Location Listed
Construction:	Die cast aluminum body with frosted acrylic diffuser




FINISHES:



Brushed Nickel Black

LINE DRAWING:

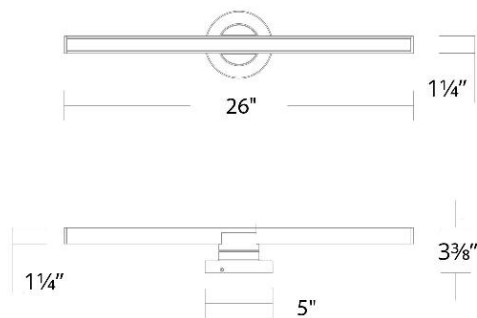

WS-99426

WAC LIGHTING

WAC LIGHTING

Bastone

Bath & Wall 4CCT

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-99436 36"	2700K	BK Black	26 W	2783	1078
	3000K	BN Brushed Nickel	26 W	2783	1078
	3500K		26 W	2783	1078
	4000K		26 W	2783	1078

Example: **WS-99436-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

A simple rectangle radiates from LED illumination. This seamless design presents a sharp visual style.

FEATURES


- Light source offers 360 degree rotation
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

SPECIFICATIONS


Color Temp:	3000K,2700K,3500K,4000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,Title 24 JA8 Compliant Damp Location Listed
Construction:	Die cast aluminum body with frosted acrylic diffuser



FINISHES:



LINE DRAWING:

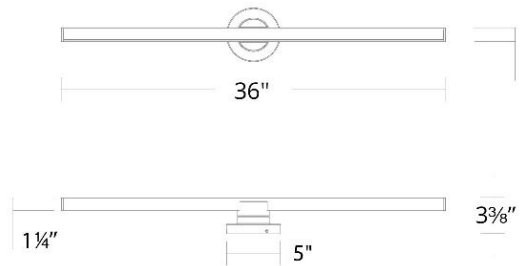

WS-99436

WAC LIGHTING