

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Stag

Outdoor Wall Sconce

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W29118 18"	3000K	AL Brushed Aluminum	16W	1265	789
	3500K	BK Black	16W	1424	883
	4000K	WT White	16W	1299	807

Example: **WS-W29118-40-WT**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Majestic, keen and sharp. A signature silhouette.

FEATURES


- Back lit with indirect illumination
- 3CCT (3000K/3500K/4000K) selectable switch
- Option to pre-select color temperature or adjust in the field
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K,3500K,4000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-10%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL,IP65,Title 24 JA8 Compliant
	Wet Location Listed
Construction:	Aluminum body, frosted glass diffuser



FINISHES:



LINE DRAWING:

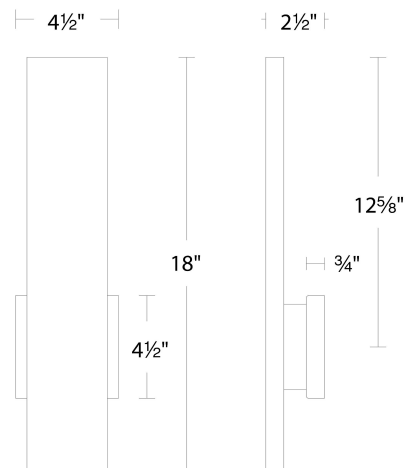

WS-W29118

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Stag

Outdoor Wall Sconce

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W29124 24"	3000K	AL Brushed Aluminum	24 W	1650	1100
	3500K	BK Black	24 W	1650	1100
	4000K		24 W	1650	1100

Example: **WS-W29124-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Majestic, keen and sharp. A signature silhouette.

FEATURES

- Back lit with indirect illumination
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology

SPECIFICATIONS

Color Temp:	4000K,3500K,3000K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	54000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant Wet Location Listed
Construction:	Aluminum body, frosted glass diffuser




FINISHES:



REPLACEMENT PARTS

RPL-GLA-29124 - Glass

LINE DRAWING:

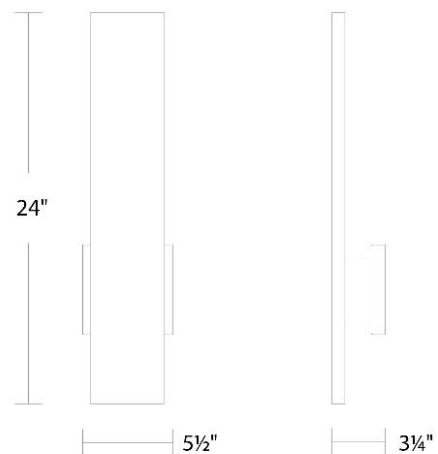

WS-W29124